



BWT besttaste
best water technology

BWT
water + more

The best water for hot and cold drinks



- High filter capacities
- Reliable particle retention
- Immediate pure water that tastes good
- Quick and easy filter change

BWT besttaste filter cartridges

provide the best water for your vending machines, coffee machines and water dispensers. Installation-related particles or even a troubling unpleasant taste or odour (e.g. chlorine) are reliably eliminated.

This guarantees an optimal taste for all hot and cold drinks. BWT besttaste enables water, e.g. for water dispensers, to maintain a consistently high quality. But coffee machines and vending machines can also benefit from the improved water quality in areas with low carbonate hardness. And for areas with high carbonate hardness (scale content), BWT bestmax filter cartridges are the ideal addition from BWT water+more – fitting into the same connection technology (filter head).

BWT besttaste top technology

- Immediate best, particle-free water
- No time-consuming rinsing
- Horizontal and vertical installation possible

Connection technology


- Universal filter head from BWT water+more
- Automatic shut-off valve when changing filter
- Pivoting wall bracket

BWT besttaste

- Eliminates unwanted odour and taste in the water
- Reduces the level of heavy metals
- Eliminates particles from 5 µm
- Special silvering of the activated carbon checks the growth of bacteria


Ideal for vending machines

- Compact and space-saving
- Simple filter exchange
- High filter capacities up to 40,000 litres

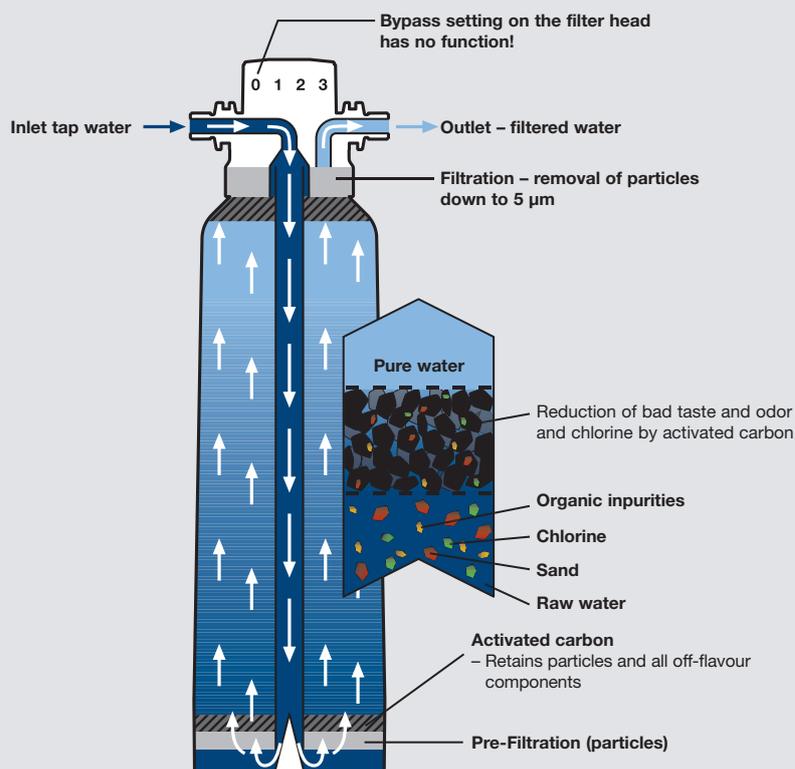

Cross-Section of a BWT besttaste filter cartridge

Technical Data*

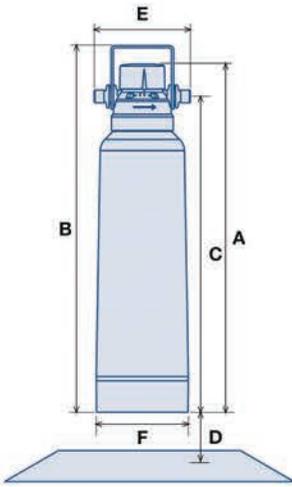

BWT besttaste Type	X	S
Connection thread (in/out)	3/8"	3/8"
Nominal flow [l/h]	180	180
Pressure loss at the nominal flow rate [bar]	0.8	0.8
Typical capacity [litres]	10,000**	40,000**
Particle filtration [µm]	5	5
Useful pressure range, min.–max. [kPa]/[bar]	200–800/2–8	200–800/2–8
Flow pressure [bar]	> 1.2	> 1.2
Water temperature, min.–max. [°C]	4–30	4–30
Recommended flush volume [litres]	3–5	3–5
Ambient temperature during operation, min.–max. [°C]	4–40	4–40
Ambient temperature during storage/transportation [°C]	-20–50	-20–50
Total height without bracket A [mm]	280	360
Total height with bracket B [mm]	300	385
Connection height C [mm]	230	310
Distance from floor D [mm]	65	65
Installed length E [mm]	125	125
Ø Filter cartridge F [mm]	88	88
Weight (dry/wet) (approximate) [kg]	0.50/1.10	0.9/1.5
Operating position	horizontal or vertical	
Order number for filter cartridge***	FS20A00A00	FS22A00A00

* Subject to change without notice

** max. 12 months

*** Important: For the installation


of a filter cartridge you need a BWT besthead (filter head) or a BWT connection kit.



A filter head for many applications and sizes

BWT bestmax filter cartridges

BWT besttaste filter cartridges



BWT bestmax filter cartridges

In areas with a high local carbonate hardness (scale content above 7 °KH), our BWT bestmax product range is available with the same universal connection technology.

- Flexible – only one connecting filter head for all product sizes
- Capacity of 600–14,400 l
- Simple – quick filter change, simple disposable system
- Cost-efficient – ideal for all compact catering appliances

Accessories

- **BWT bestmax "all in one" Connection Kit (Complete BWT Connection Kit, including filter head)**

1 x BWT besthead (filter head), 1 x BWT connecting hose with elbow and stopcock – 1500 mm (DN 8, 3/8" x 3/8"), 1 x BWT bestflush, 1 x BWT water block, 1 x reduction IG 3/8" x AG 3/4" (plastic), 1 x reduction IG 3/4" x AG 3/8" (plastic), 1 x BWT w+m Service Card

Order number.: FS00Y70A00

- **BWT besthead (filter head)** Order number.: FS00Y00A00

- **1 x BWT test kit for hot drinks to determine the carbonate hardness and total hardness of drinking water**

Order number.: YS00Y01A00